

# CUT<sup>D</sup> LITE

C-8132



**Next Generation Gloves**

## THE BENCHMARK STANDARD FOR CUT LEVEL D GLOVES

You'll forget you're wearing cut resistant gloves with the NXG™ Cut D Lite. NXG™ sets the benchmark in Level D cut resistance for durability and wearability on tough jobs. These super lightweight, ergonomically designed gloves with extra thumb and forefinger reinforcing can be used on touchscreens. All-round breathability and dexterity help you get the tough jobs done safely.

### FEATURES

- + Super lightweight 18 gauge Cut Level D glove
- + Touchscreen compatible
- + Excellent fit, breathability and performance
- + Oeko-Tex® 100, Sanitized® and dermatologically accredited
- + Sizes 6 to 12



Request free samples

CERTIFIED PRODUCT



**Why BSI Certification:** By certifying with BSI, Safety Mate demonstrates to users of our products, that they not only use industry-respected best practices but also choose to work with the organization that developed many of these standards. As a highly trusted global regulator, BSI tests products against industry recognised standards. In a world where safety is of paramount importance, BSI and its logo offer additional value and guarantees that products have been expertly tested to market-leading standards of quality, safety and durability.

### PERFORMANCE STANDARDS

EN 388: 2016



4X42D

CERTIFIED PRODUCT



AUSTRALIA & NZ STANDARDS  
AS/NZS 2161.3:2020  
LIC: BMP 757372

### CUT RESISTANCE RATING ACCORDING TO NEW EN388: 2016 STANDARD

	○	○	○	○	●	○	○
<b>CUT LEVEL</b>	X	A	B	C	D	E	F
<b>FORCE TO CUT</b>	≥ 15N (1529g) < 22N (2243g)						
<b>CUT RISK ASSESSMENT</b>	Medium/ High						

### TECHNOLOGIES



CUT<sup>D</sup>



360°  
BREATHABILITY



ERGONOMICALLY  
SHAPED



REINFORCED  
THUMB AREA



TOUCH SCREEN



VENDING  
PACK AVAILABLE



HAND HEALTH

**OEKO-TEX®**  
CONFIDENCE IN TEXTILES  
**STANDARD 100**  
TESTED FOR HARMFUL SUBSTANCES



**PRODUCT DISCLAIMER:** Gloves that provide cut resistance are not cut-proof. The risk for these sorts of injuries will not be completely eliminated or prevented by the use of gloves. Cut resistant gloves are not intended to provide protection against powered rotated blades or equipment, serrated or other sharp or rotating equipment. It is the responsibility of companies and/ or glove users to perform their own testing to determine the suitability for a particular application or use within the environment the gloves are to be used. Safety Mate Pty Ltd may revise this information as new information, knowledge or experience becomes available. EN407 tests are performed on the palm part of gloves only.

**NXG**  
NEXT GENERATION GLOVES

**Riley**

**MEC DEX**  
HI DEXTERITY MECHANICS GLOVES



**SafetyMate**

www.safetymate.com.au | info@safetymate.com.au | AUS: (07) 5582 6400 | NZ: +64 21 332 877

# WILL YOUR SAFETY GLOVES MEET THE NEW AUSTRALIAN STANDARD?

Safety Mate has always been serious about preventing hand injuries. That's why we brought a new standard of glove to the Australian market. Now Australian standards are catching up.

The new standard was published in December 2020 as AS/NZS 2161.3:2020 and key features are:

- more accurate simulation of real life cut dangers
- an additional cut (TDM-100) rating and an optional impact rating
- Australian standards mirroring European standard EN388:2016

## THE NEW RATING

EN 388: 2016



Test	Levels	4	5	4	4	F	P
Abrasion	1-4	←	←	←	←	←	←
Cut (Coupe Test)	1-5	←	←	←	←	←	←
Tear (N)	1-4	←	←	←	←	←	←
Puncture (N)	1-4	←	←	←	←	←	←
Cut (TDM-100 Test)	A-F	←	←	←	←	←	←
Impact protection	X or P	←	←	←	←	←	←

The new cut test is a game-changer for safety gloves. It will more accurately rate protection where there's a higher risk of cut injuries. This means gloves previously rated at Level 5 cut resistance may only give low to medium protection in some circumstances.

The NXG range of cut-resistant gloves already meets EN388:2016 and includes 8 Cut Level D glove styles, and 3 Cut Level F models. We're ready to assist with risk assessment and hand protection user trials to ensure your workforce are protected. Contact us to discuss the new standards and to arrange a free site glove audit and trials.

## PERFORMANCE TESTS AGAINST:



Abrasion



Old cut (coup) resistance



Tear



Puncture



New cut (TDM) resistance




Impact

## New cut (TDM) resistance levels

Level	Force to cut (Newtons/grams)	Risk*
X	<2 N (203g)	None
A	≥ 2N (203g)	Low
B	≥ 5N (509g)	Low/ Medium
C	≥ 10N (1019g)	Medium
D	≥ 15N (1529g)	Medium/ High
E	≥ 22N (2243g)	High
F	≥ 30N (3059g)	Very High

\*This is Safety Mate's opinion only. The suitability of all PPE should be risk assessed based on applications

## COUP TEST

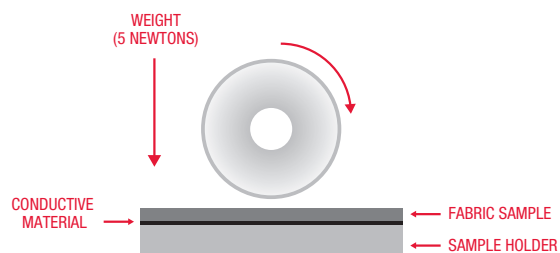

## TDM TEST

TRAVEL OF BLADE IN SINGLE DIRECTION NEW BLADE FOR EACH TEST

